



WORLD'S LEADING AIR CONDITIONING
COMPANY FROM JAPAN

FVFS Series

Cooling Only Floor-Standing



Selectable Fan
Speed



Turbo Cool



With Wireless
Controller



Dry Mode



Long Life
Filter



FVFS COOLING ONLY NON-INVERTER SERIES

An ideal way of saving space through style and functionality with its ease of installation. Its suited to be installed in offices, commercial shops, restaurants, and showrooms.

Cooling Only	FVFS24AV16	7.1 kW	 24°C Default Temperature Setting
	FVFS36AV16	10.5 kW	




Large Buttons
on Control Panel for Ease of Use

COMFORT

FLOOR-STANDING AC AIR FLOW

The floor-standing AC is able to achieve air flow distance up to 70 Feet (21.3m)

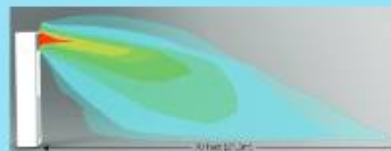

Auto horizontal swing



Manual setting of vertical airflow louvers

AUTO RANDOM RESTART WITH LAST-STATE-MEMORY

In the event of a sudden power failure during operation, the floor-standing AC restarts automatically in 64 different recovery timing patterns (within 180 seconds to 244 seconds) and it will operate based on the previous settings (operating mode, temperature setting and fan speed). This ensures that air-conditioners in the same building resume randomly instead of all units resuming at the same time preventing power surge after a blackout.

KEY FEATURES



Selectable Fan Speed



Turbo Cool



With Wireless Controller



Dry Mode



Long Life Filter



High Gloss Panel



Air Throw
70 feet



Horizontal and
Vertical Swing



Energy Saver
Mode



24°C
Default Settings



CM/L-8300139508
CM/L-8400163007



Pocket Remote with
Night Glow Buttons

TECHNICAL SPECIFICATIONS

Model Name			Indoor Unit	FVFS24AV16	FVFS36AV16
			Outdoor Unit	RGFS24AV16	RGFS36AV16
Nominal Cooling Capacity			TR	2	3
			Btu/h	24226	35862
			kW	7.1	10.5
Nominal Total Input Power (Cooling)			W	1970	3150
ISEER			Wh/Wh	3.6	3.34
*Star Rating				1	1
Power Source			V/Ph/Hz	230/1-Ph/50 Hz	
Refrigerant Control (Expansion Device)				Capillary Tube	
Refrigerant Type				R-32	
Indoor Unit	Air Flow	High	cfm	1059	
		Medium		941	
		Low		823	
	Sound Pressure Level	High	dBA	51	
		Medium		48	
		Low		46	
	Unit Dimension	Height	mm	1800	
		Width	mm	600	
		Depth	mm	386	
	Unit Weight		kg	59	
Outdoor Unit	Unit Dimension	Height	mm	595	990
		Width	mm	845	940
		Depth	mm	300	320
	Operating Range		°CDB	21-48	
	Unit Weight		kg	46.5	74
	Pipe Connection	Liquid	mm	6.35mm	9.52mm
		Gas	mm	15.9mm	
Max Piping Length			m	20	20
Max Piping Elevation			m	10	10

Measurement conditions:

- Cooling capacity is based on: Indoor temp. 27° CDB, 19° CWB; outdoor temp. 35° CDB, piping length 7.5m.
- Sound levels are based on temperature conditions 1. above with 7.5m piping length. These are anechoic conversion values. These values are normally somewhat higher during actual operation as a result of ambient conditions. Cooling and heating capacities above are rounded off to first decimal. 1TR (Ton of Refrigeration) = -3.517 kilowatt.

* Star rating mentioned as per ISEER Table defined by bureau of Energy Efficiency (BEE), Ministry Of Power.

As per Continuing Policy of Product Innovation at Daikin, The Design, Technical Specifications, Features, Look may change without prior Notice.

APPLICATION OF THE PRODUCT



FUNCTION HALL

Versatility and control are the keys to create a comfortable condition within trading areas and changing rooms that will keep customers shopping. It's important to select a system that offers excellent performance, while minimising operating costs and energy consumption.



OFFICES / BANKS

The challenge for an office or bank is the ability to effectively heat or cool open plan areas as well as meeting rooms. Cooling a meeting room when it is empty will mean running costs mount up unnecessarily. Conditions within open-plan areas are important for staff comfort levels.



HOME

Home should feel comfortable all the time. Daily activities and sunlight can make rooms warm and stuffy. A tower AC provides quiet, flexible cooling that blends seamlessly into your space while keeping your home pleasantly cool.



RESTAURANTS

Guests expect a perfect atmosphere, including comfortable conditions. Heat generated from lighting, the kitchen area and the dining area can all contribute to make restaurants uncomfortable with inadequate air-conditioning. Air-conditioning needs to be discreet and flexible to meet the demands of your restaurant and customers.

DAIKIN AIRCONDITIONING INDIA PVT. LTD. : 12th Floor, Building No. 9, Tower A, DLF Cyber City, DLF Phase - III, Gurgaon - 122002, Haryana. Tel.: (0124) 4555444, Fax: (0124) 4555333.

For service related queries: WhatsApp "iS" at 987 140 9300, Call our Customer Contact Centre at 011-4031-9300/ 1860 180 3900, or write to us at customerservice@daikinindia.com
Follow us on: www.facebook.com/daikinindia www.twitter.com/daikinindia www.instagram.com/daikinindia www.linkedin.com/company/daikin-airconditioning-india-pvt-ltd

As a continuing policy of product innovation at Daikin, the design and specifications are subject to change without prior notice. The visuals of the products in this leaflet are representative only, actual products might differ from the ones shown. Products mentioned in this leaflet comply with RoHS regulations as per E-waste (Management & Handling) Rules, 2011 and should not be mixed with general household waste at the end of their useful life. For more details kindly visit our website www.daikinindia.com or contact our customer care centre at 011-40319300 / 1860 180 3900.