



# 5 STAR STANDARD BUILDER SERIES

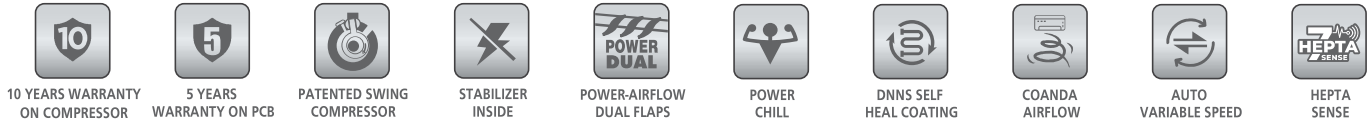

## GTKU Series

Available in: Cooling (kW) 3.52, 5.0  
IDU Colour: White

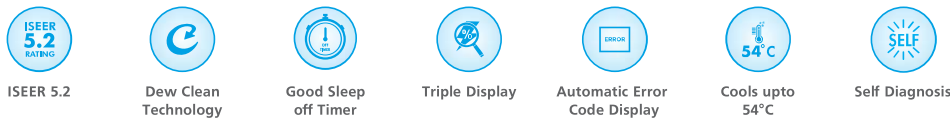

Note: \*Air throw given for 5.28kW capacity, may vary from model to model.

## SPECIFICATIONS

Model name		Indoor unit (IDU)	GTKU35UV16W3	GTKU50UV16VFC
		Outdoor unit (ODU)	RKUG35UV16W3	RKUG50UV16VFC
Star Rating*			5 Star	5 Star
Rated Power supply (Phase /Frequency/Voltage )			1φ 50Hz 230V (220-240V)	1φ 50Hz 230V (220-240V)
Power Supply Intake			Outdoor unit	Outdoor unit
Rated Cooling Capacity Full/Half (min.~max.)		kW	3.52/1.76 (1.09-4)	5/2.5 (1.5-5.6)
Rated Cooling Capacity Full/Half (min.~max.)		Btu/h	12000/6000(3720-13650)	17100/4550 (5100-19100)
Rated Power Consumption Full/Half (min.~max.)		W	940/290 (196-1150)	1310/420 (250-1600)
Rated Annual Power Consumption		kWh	523.54	744.54
Rated ISEER		Wh/Wh	5.2	5.2
Voltage Range (Stabilizer Inside)		Cooling	V	130-285
Operating Current		Cooling	A	4.3
Indoor unit (IDU)	Panel Color		White	White
	IDU Dimension (HxWxD)		298 x 800 x 229	298 x 885 x 229
	Package Dimension (HxWxD)		375 x 895 x 325	375 x 980 x 325
	IDU Net Weight (Gross Weight)		kg	9.5 (12.5)
	Airflow Rate		Cooling	Feet <sup>3</sup> /min(cfm) m <sup>3</sup> /min(cmm)
Operation sound H/M/ML/L/SL		Cooling	dBA	42/40/37/34/30/27
Outdoor unit (ODU)	ODU Dimension (HxWxD)		mm	550 x 675 x 284
	Package Dimension (HxWxD)		mm	620x 825 x 410
	ODU Net Weight (Gross Weight)		kg	24(30)
	Compressor Type			Swing Compressor
	Refrigerant			R-32
Breaker size		A	15	20
Piping length	Charge-Less		10	10
	Max. Length		15	20
	Max. Height		12	16
Piping Connection		Gas/Liquid	mm(Inch)	∅9.5 / ∅6.4(3/8"/1/4")
Operating Ambient Temperature Range		Cooling(Min-Max)	°CDB	20-54

### Measurement conditions:

- Cooling capacity is based on: indoor temp. 27° CDB, 19° CWB; outdoor temp. 35° CDB, piping length 5 m.
- Sound levels are based on temperature conditions 1. above with 5m piping length. These are anechoic conversion values. These values are normally somewhat higher during actual operation as a result of ambient conditions. Cooling and heating capacities above are rounded off to first decimal. 1TR (Ton of Refrigeration) = -3.517 kilowatt.

\*Star Rating mentioned as per ISEER Table 3.2 f, defined by Bureau of Energy Efficiency (BEE), Ministry Of Power.

Value given in Inch

As per Continuing Policy of Product Innovation at Daikin, The Design, Technical Specifications, Features, Look may change without prior Notice.

\*W3-Compressor Used Rotary.